B1 SERIES STANDARD MICRO SWITCH

www.brisk.co.in

T Type Micro Switch



CE RoHS

Features

- Complying with IEC 60947-5-1
- Silver Contact
- Beryllium copper spring
- Highly Reliable

Design

BRISK Brand Micro Switches are single pole change over snap action switches featuring exceptional repeat accuracy and strict quality control with Beryllium Copper spring and silver contact.

Technical Specification


Electrical Specification

Rating	: 15A / 250V AC
Contact	: 1 NO 1 NC
Contact Resistance	: 10 m Ω
Insulation Resistance	: 100 M Ω
Electrical Life	: 1 lakh operation
High Voltage Test	: 1 KV AC between open contacts

Mechanical Specification

Contact	: Silver contact
Spring	: Beryllium Copper
Terminal	: Brass
Operating Force	: 500 gms.
Mechanical Life	: 1 million operation
Actuator	: Short Roller Lever


Dimensions

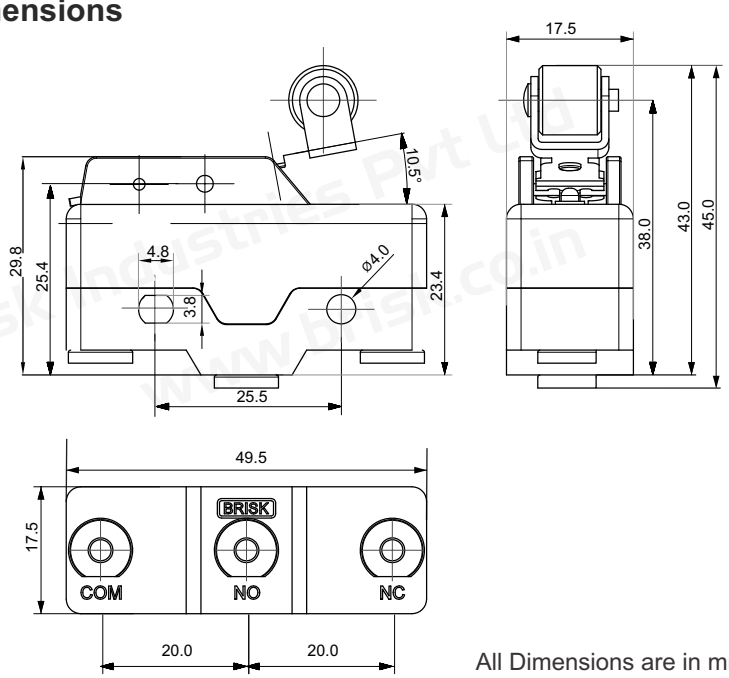

All Dimensions are in mm.

Contact form

SPDT



Ordering code

Order Code	Rating	Contact form
T-03	15A / 250 V AC	SPDT

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS

Rev No: 02 Dt. May 2024